

Tow-Behind Spike Aerator Assembly Instructions




support@landzie.com



(856) 360-4823


Parts List:

Watch Our Assembly Video!

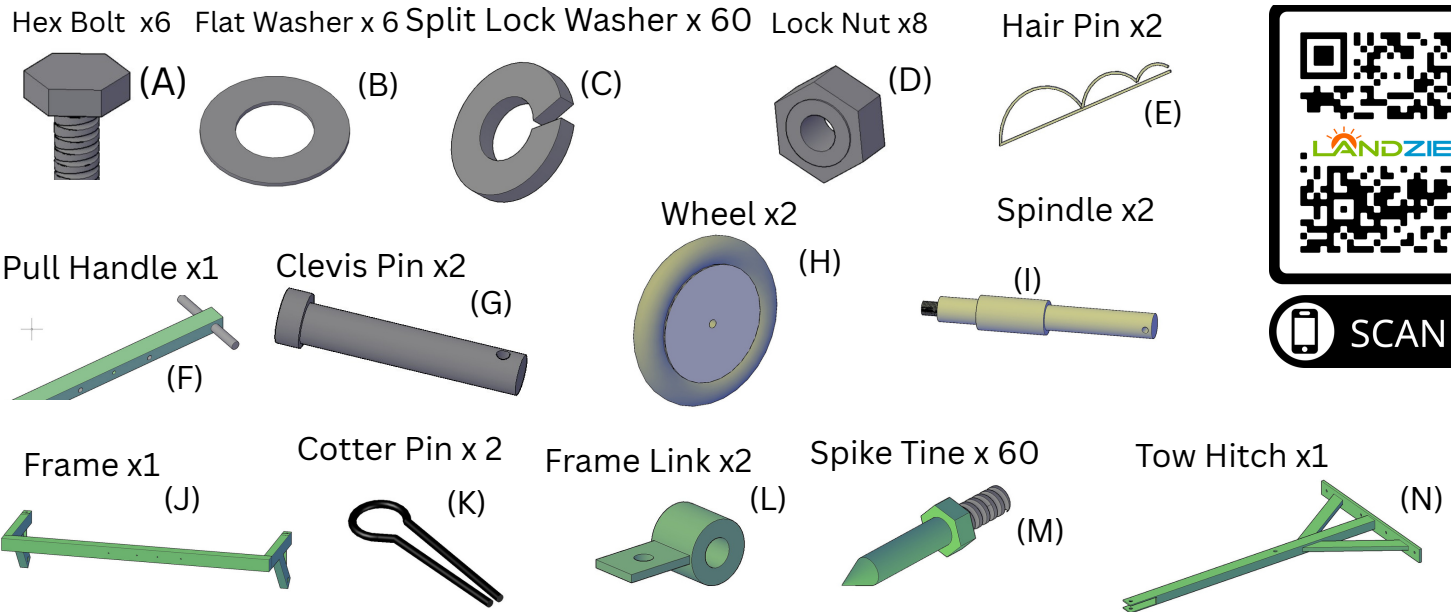


Step 1:

Start by sliding the first spindle (I) through the side hole found on either side of the transport frame (J). Next, tighten down a locknut to attach spindle to transport frame (J). Attach the wheel (H) to the spindle (I) using a flat washer (B) and cotter pin (K)

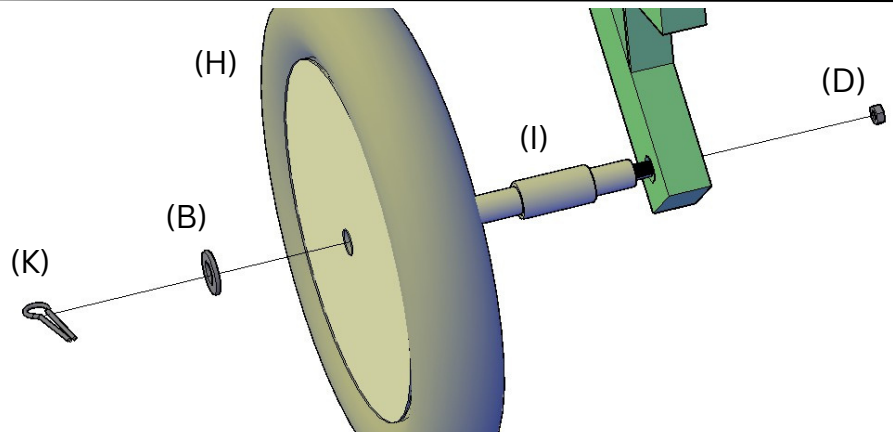


Step 2:

Attach the tow hitch (N) to the transport frame (J) using 4 hex bolts (A), 4 washers (B), and 4 lock nuts (D). Add pull handle (F) to tow hitch (N) using clevis (G) and hairpins (E).

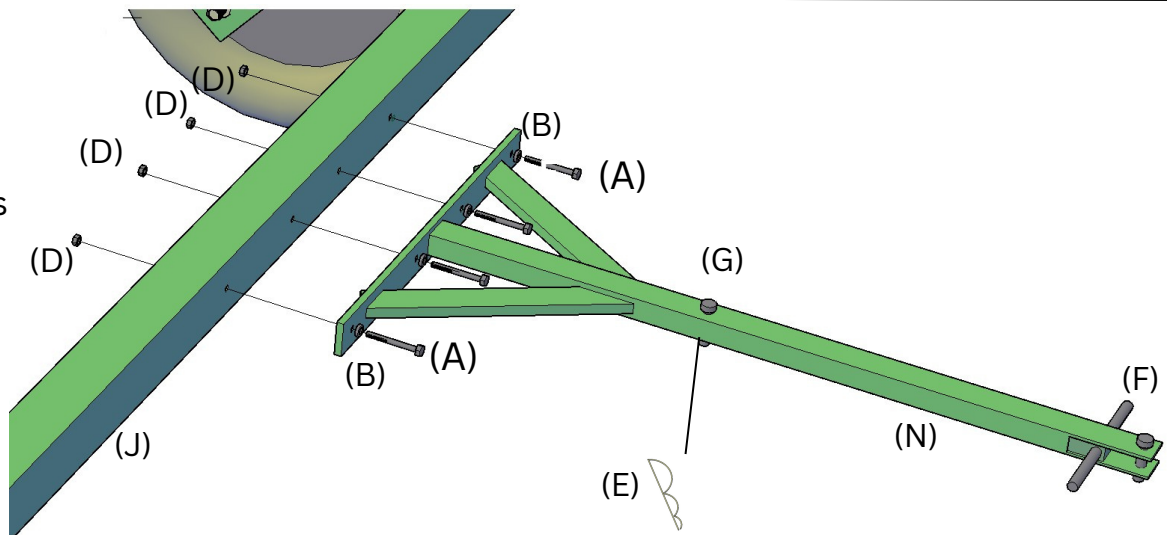


Step 3:

Join the aerator barrel to the transport frame (J) using both frame links (L), hex bolts (A), locknuts (D), and flat washers (B).

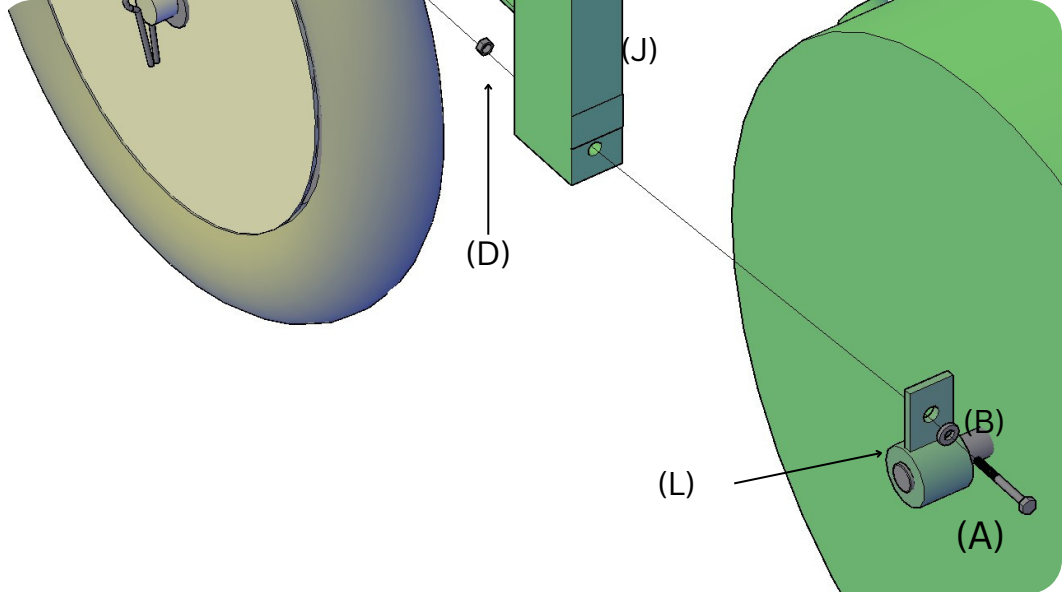


Step 4:

With the aerator barrel successfully joined to the transport frame (J) add all spike tines (M) to the aerator barrel. Ensure spike tines (M) are tightened to compress split lock washers (C) for proper installation.

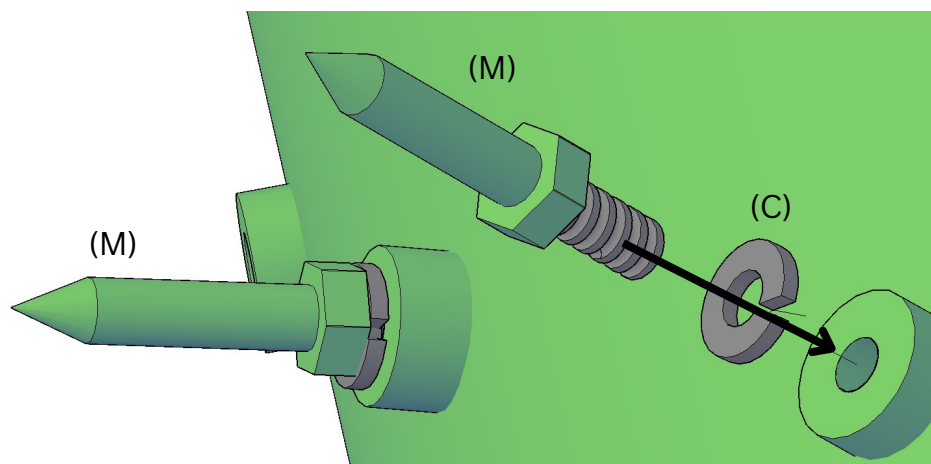

Step 5

Lastly, using the now attached handle flip it so that wheels no longer touch ground. It is now ready to be towed for aeration.

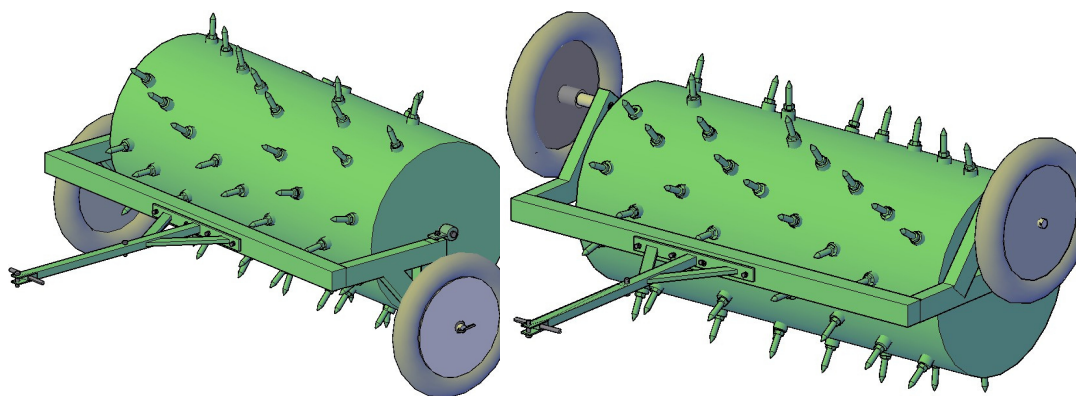

Our Customer Support Team is Here to Help!

Please give us a call at **(856) 360-4823** or send an email to **support@landzie.com** for further questions and assistance.